


MCKARLEN

BAV - 50Hz



SEWAGE PUMP

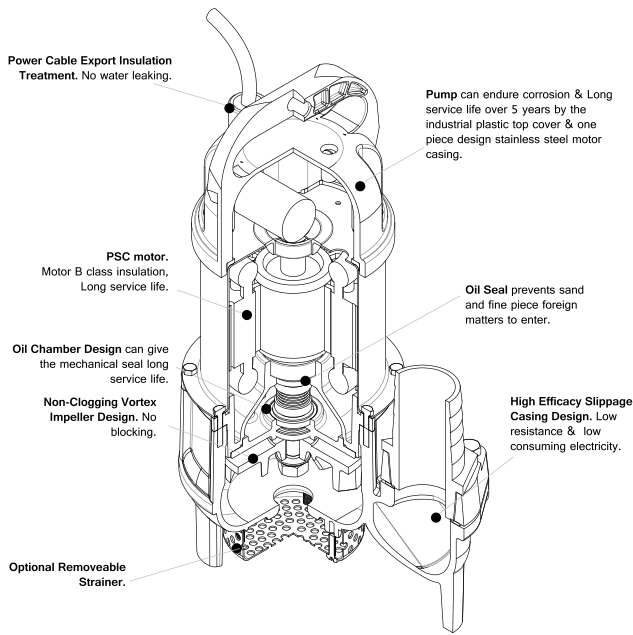

Weight : 30 - 35 kg

SPECIFICATION

OUTPUT	HEAD	FLOW
0.15 - 0.55 kW	Min : 6 m	Min : 160 l/min
	Max : 12 m	Max : 340 l/min

Motor


2 Pole, 50Hz
1 Phase
Protection Type IP68
Speed 2900 / 3450rpm

Pump

Impeller : Vortex/Non-clogging
Material
Impeller : FC200
Casing : FC200
Motor Housing : SUS304
Mechanical Seal : CA/CE
Shaft : SUS410
pH 6 up to 8
Max. liquid temp : 40°C (104°F)
Max. depth 8m

APPLICATION

- Industrial Sewage and Drainage

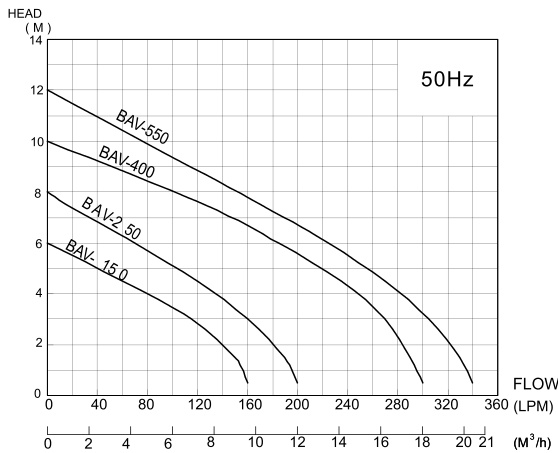

Model	Output		Outlet		Dimension (mm)	Weight (Kg)
	HP	kW	mm	inch		
BAV-150	1/5	0.15	32	1-1/4	190 x 130 x 280	6
BAV-250	1/3	0.25	40	1-1/2	190 x 130 x 280	9
BAV-400	1/2	0.4	50	2	200 x 135 x 285	11
BAV-550	3/4	0.55	50	2	236 x 145 x 352	12