

**MCKARLEN**

To **improve** your **water** life

**GC - 50Hz**




**SEWAGE  
PUMP WITH GRINDER**



# SEWAGE PUMP WITH GRINDER - GC

# MCKARLEN

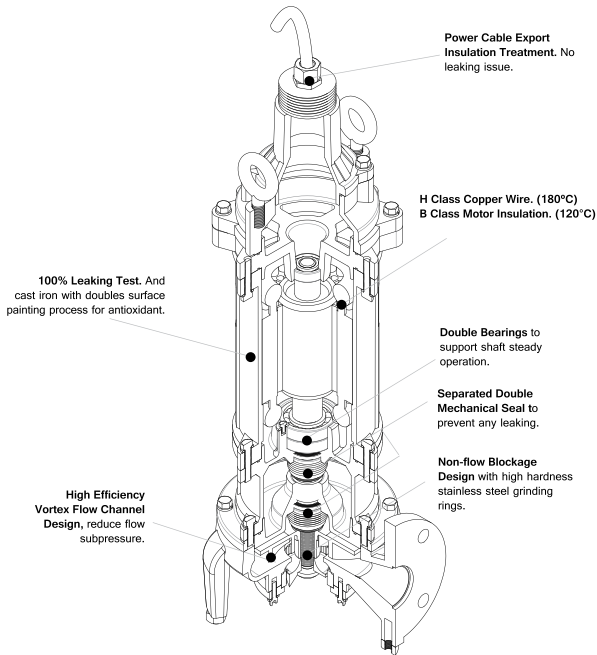

Weight : 10 - 95 kg

## SPECIFICATION

OUTPUT	HEAD	FLOW
0.55 - 5.5 kW	Min : 10 m	Min : 140 l/min
	Max : 50 m	Max : 320 l/min

### Motor


2 Pole, 50Hz  
Speed 2900 rpm  
1 and 3 Phase  
Protection Type IP68

### Pump

Material  
Impeller : Ductile iron  
Casing : Cast Iron  
Suction Cover : Cast Iron  
Mechanical Seal :  
07,10,20,30 are CA/CE  
50,75 are Top CA/CE and  
Down SIC/SIC  
Cutter : SUS440C  
pH 6 up to 8  
Max. liquid temp : 40°C (104°F)  
Max. depth 8m

## APPLICATION

- Sewage disposal.
- Grinds up elastic disposal

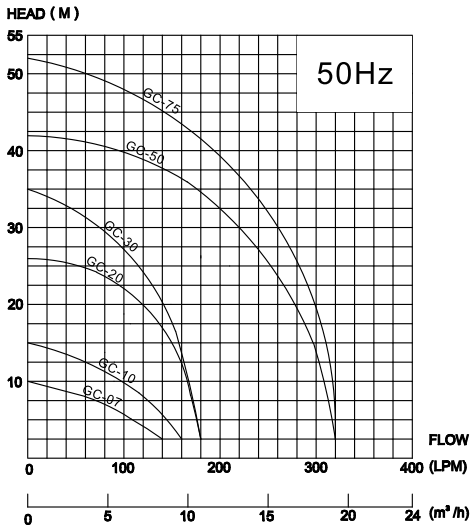

Model	Output		Outlet		Dimension L x W x H (mm)	Weight (Kg)
	HP	kW	mm	inch		
GC-07	0.7	0.55	32	1-1/4	-	10
GC-10	1	0.75	32	1-1/4	-	15
GC-20 G	2	1.5	32	1-1/4	240x200x560	27
GC-30 G	3	2.2	50	2	240x200x560	28
GC-50 G	5	3.7	65	2-1/2	270x238x830	94
GC-75 G	7.5	5.5	65	2-1/2	270x238x830	95

Specifications can be changed without notice