

MCKARLEN


SV - 50Hz

**SEWAGE
PUMP**



SEWAGE PUMP - SV

MCKARLEN

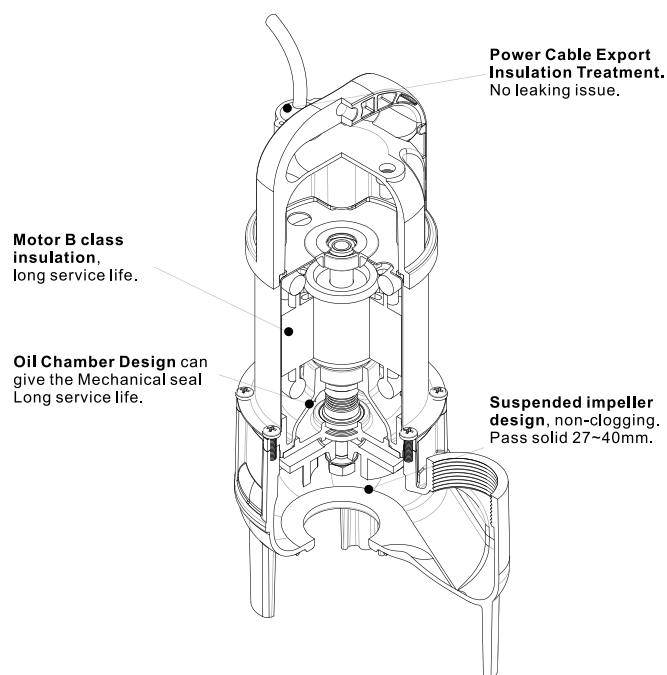

Weight : 30 - 35 kg

SPECIFICATION

OUTPUT	HEAD	FLOW
0.15 - 1.5 kW	Min : 6 m	Min : 160 l/min
	Max : 16 m	Max : 700 l/min

Motor



2 Pole, 50Hz
1 Phase
Protection Type IP68
Speed 2900 / 3450rpm

Pump

Impeller : Vortex / Non-Clogging
Material
Impeller : FC200
Casing : FC200
Motor Housing : SUS304
Mechanical Seal : CA/CE
Shaft : SUS410
pH 6 up to 8
Max. liquid temp : 40°C (104°F)
Max. depth 8m

APPLICATION

- Industrial Sewage and Drainage

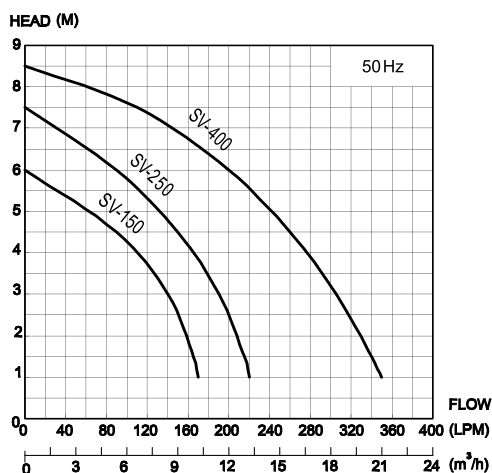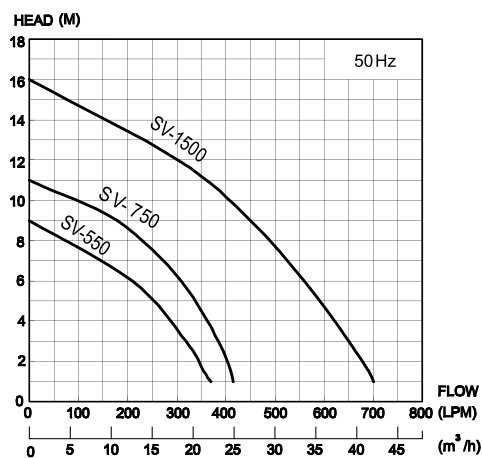

Model	Output		Outlet		Dimension (mm)	Weight (Kg)
	HP	kW	mm	inch		
SV-150	1/5	0.15	40	1-1/4	415 x 155 x 210	8
SV-250	1/3	0.25	40	1-1/2	415 x 155 x 210	9
SV-400	1/2	0.4	50	2	435 x 155 x 240	11
SV-550	3/4	0.55	80	2	435 x 155 x 260	17
SV-750	1	0.75	80	3	435 x 155 x 260	18
SV-1500	2	1.5	80	3	610 x 270 x 350	31