

MCKARLEN

SG - 50Hz



SEWAGE PUMP

www.mckarlen.com



SEWAGE PUMP - SG

MCKARLEN

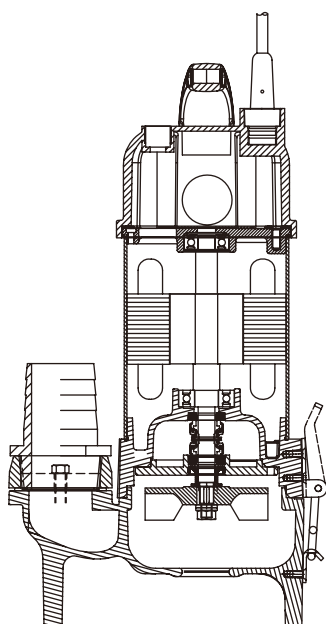

Weight : 11 - 18 kg

SPECIFICATION

OUTPUT	HEAD	FLOW
0.4 - 0.75 kW	Min : 8 m	Min : 360 l/min
	Max : 11 m	Max : 430 l/min

Motor

2 Pole, 50Hz
1 Phase
Protection Type IP68
Speed 2900 / 3450rpm

Pump

Impeller : Vortex / Non-clogging
Material
Impeller : FC-200
Casing : FC-200
Suction Cover : FC-200
Shaft : SUS410
pH 6 up to 8
Max. liquid temp : 40°C (104°F)
Max. depth 8m

APPLICATION

- Industrial Sewage and Drainage

Model	Output		Outlet		Dimension (mm)	Weight (Kg)
	HP	kW	mm	inch		
SG-400	1/2	0.4	50	2	207x162x438	11
SG-750	1	0.75	50	2	257x176x487	18

