

MCKARLEN

GD - 50Hz




SEWAGE PUMP WITH GRINDER



SEWAGE PUMP WITH GRINDER - GD

MCKARLEN

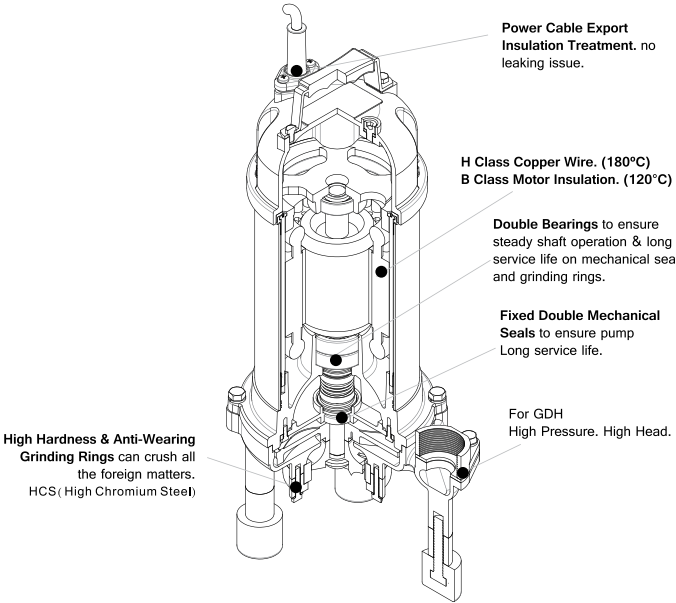

Weight : 30 - 35 kg

SPECIFICATION


OUTPUT	HEAD	FLOW
1 - 2.2 kW	Min : 20 m	Min : 230 l/min
	Max : 30 m	Max : 235 l/min

Motor
2 Pole, 50Hz
1 and 3 Phase
Protection Type IP68
Speed 2900rpm / 3450rpm

Pump
Material
Impeller : FC200
Casing : FC200
Suction Cover : Cast Iron
Mechanical Seal : CA/CE + SIC/SIC
Shaft : SUS410
Cutter : Chrome Steel
pH 6 up to 8
Max. liquid temp : 40°C (104°F)
Max. depth 8m

APPLICATION

- Sewage disposal.
- Grinds up elastic disposal

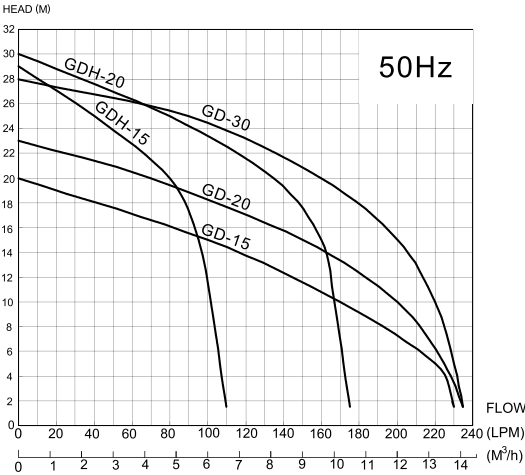

Model	Output		Outlet		Dimension (mm)	Weight (Kg)
	HP	kW	mm	inch		
GD-15	1.5	1	32	1-1/4	245 x 200 x 525	30
GD-20	2	1.5	32	1-1/4	245 x 200 x 525	32
GD-30	3	2.2	32	1-1/4	245 x 200 x 575	35
GDH-15 G	1.5	1	32	1-1/4	240 x 190 x 500	30
GDH-20 G	2	1.5	32	1-1/4	240 x 190 x 520	32