

MCKARLEN

To **improve** your **water** life

HF - 50Hz


**SEWAGE
PUMP**

www.mckarlen.com




SEWAGE PUMP - HF

MCKARLEN

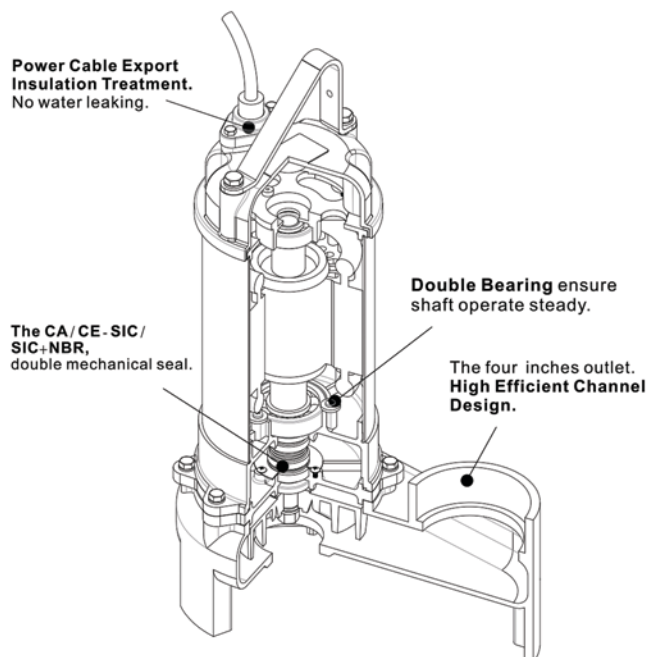

Weight : 25 - 33 kg

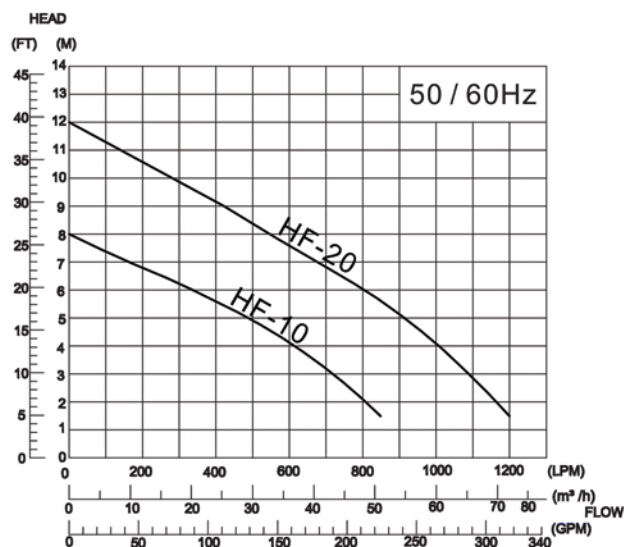

Dimension								
Model	L	W	W1	H	H1	H2	H3	G
	mm	mm	mm	mm	mm	mm	mm	inch
HF-10	350	210	130	550	320	125	160	4
HF-20	350	210	130	600	360	125	160	4

SPECIFICATION

OUTPUT	HEAD	FLOW
0.75 - 1.5 kW	Min : 8 m	Min : 850 l/min
	Max : 12 m	Max : 1200 l/min

Motor

2 Pole, 50Hz
1 Phase
Protection Type IP68
Speed 2900 / 3450rpm


Pump

Impeller : Cast Iron
Material
Impeller : FC200
Casing : FC200
Motor Housing : SUS304
Mechanical Seal : CA/CE
Shaft : SUS410
pH 6 up to 8
Max. liquid temp : 40°C (104°F)
Max. depth 8m

APPLICATION

- Industrial Sewage and Drainage
- Aquaculture Circulating Water
- Garden Waterfall

Model	Output		Outlet		Dimension (mm)	Weight (Kg)
	HP	kW	mm	inch		
HF-10	1	0.75	100	4	350 x 210 x 550	25
HF-20	2	1.5	100	4	350 x 210 x 600	33

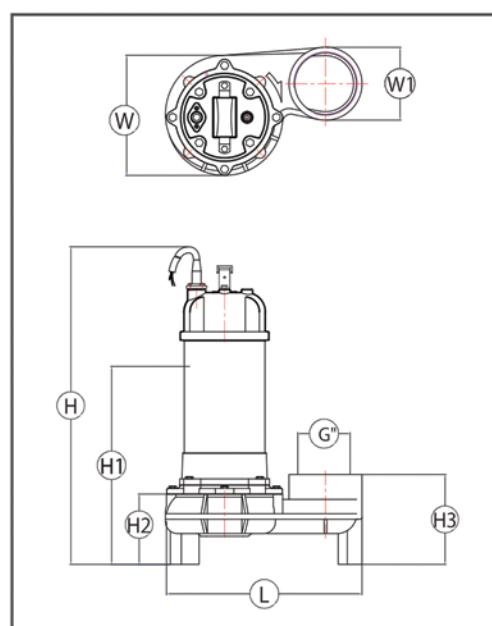

Specifications can be changed without notice